

**Series 2, telescopic cooker hood, 90 cm, Silver metallic
DFT93CA50M**



The telescopic cooker hood: practically disappears into your upper cabinet, giving you a sleek kitchen front.

- With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.
- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes
- Slide Switch Control

Technical Data

Typology : Pull-out

Approval certificates : CE, G-Mark, VDE

Length electrical supply cord : 110 cm

Required niche size for installation (HxWxD) : 135mm x 898.0mm x 264mm mm

Net weight : 9.4 kg

Type of control : mechanical

Number of speed settings : 3

Maximum output air extraction : 305 m³/h

Maximum output recirculating air : 240 m³/h

Number of lights : 2

Noise level : 67 dB(A) re 1 pW

Diameter of air outlet : 150 mm

Grease filter material : Washable aluminium

Odour filter : No

Operating Mode : Air extraction only

Optional accessories : DWZ9IX1G9

Total power of the lamps : 8 W

Grease filter type : Kasette

Connection Rating : 153 W

Voltage : 220-240 V

Frequency : 50 Hz

Plug type : GB plug

Installation typology : Built-in

Material body : Lacquered

Approval certificates : CE, G-Mark, VDE

Plug type : GB plug

Dimensions of the product, with chimney (if exists) (in) : / x x

Dimensions of the packed product : 14.56 x 10.03 x 37.67

Net weight : 21.000 lbs

Gross weight : 23.000 lbs

Motor location : Integrated motor in hood body

No-return airflow flap : No

Length electrical supply cord : 110 cm

Dimensions of the product, with chimney (if exists) : 175 x 898.0 x 300.0 mm

Dimensions of the packed product (HxWxD) : 370 x 255 x 957 mm

Net weight : 9.4 kg

Gross weight : 10.5 kg



Series 2, telescopic cooker hood, 90 cm, Silver metallic DFT93CA50M

The telescopic cooker hood: practically disappears into your upper cabinet, giving you a sleek kitchen front.

Variant:

Design:

- Pull-out vapour with glass

Comfort:

- Suitable for ducted or re-circulated extraction
- 3 speeds control
- Single motor
- 2 X 4 W LED Illumination
- Metal grease filter, dishwasher safe

Environment and Safety:

- Energy Efficiency Class: D*
- Average Energy Consumption: 88.6 kWh/year*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: C*
- Handle strip white

Technical information:

- Ducted extraction rate according to DIN/EN 61591 max. 305 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 67 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Noise min./max. Normal Level: 53/67 dB*
- Power rating: 153 W
- Light Intensity: 100 lux
- Colour Temperature: 3000 K


Measures:

- Dimensions exhaust air (HxWxD): 175-175 x 898 x 300 mm
- Dimensions recirculating (HxWxD): 175-175 x 898 x 300 mm
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)

* In accordance with the EU-Regulation No 65/2014

**Series 2, telescopic cooker hood, 90 cm,
Silver metallic
DFT93CA50M**

measurements in mm

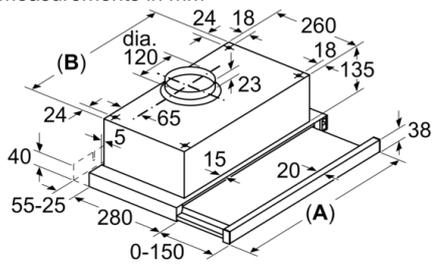

Hood Type	A	B	Hood Type	A	B
450	448	348	700	698	598
500	498	398	800	798	698
550	548	448	900	898	798
600	598	498			