

**Series 4, built-under cooker hood, 90 cm, Stainless steel
DHU965CGB**



DHZ2700 Active carbon filter

The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- **3-Speed Power Level Options To Suit Your Cooking Style And Recipes**

Typology: Built-in/Built-under
 Length electrical supply cord: 130 cm
 Net weight: 10.6 kg
 Type of control: mechanical
 Number of speed settings: 3
 Max. air recirculation: 260 m³/h
 Number of lights: 2
 Noise level: 68 dB(A) re 1pW
 Diameter of air outlet: 120 mm
 Grease filter material: Washable aluminium
 Odour filter: Yes
 Operating Mode: Convertible
 Optional accessories: DHZ2700
 Type of lamps used: Halogen
 Total power of the lamps: 56 W
 Grease filter type: Kasette
 Clean filter reminders: No
 Connection rating: 306 W
 Fuse protection: 13 A
 Voltage: 230-240 V
 Frequency: 50 Hz
 Plug type: GB plug
 Installation typology: Built-under
 Material body: Stainless steel
 Plug type: GB plug
 Dimensions of the product, with chimney (if exists) (in): x x
 Dimensions of the packed product: 21.65 x 8.26 x 36.61
 Net weight: 23.000 lbs
 Gross weight: 26.000 lbs
 Motor location: Integrated motor in hood body
 No-return airflow flap: No
 Length electrical supply cord: 130 cm
 Dimensions of the product, with chimney (if exists): .x 900.0 x 482.0 mm
 Dimensions of the packed product (HxWxD): 550x210x930 mm
 Net weight: 10.6 kg
 Gross weight: 11.7 kg



Series 4, built-under cooker hood, 90 cm, Stainless steel DHU965CGB

The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

Variant:

Design:

- 900 mm width

Comfort:

- Suitable for ducted or re-circulated extraction
- Push button controls for 3 speeds
- Twin motor
- Adjustable glass visor
- 2 x halogen - energy saving lamps
- Metal grease filter, dishwasher safe

Technical information:

- Ducted extraction rate according to DIN/EN 61591: max. 350 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 68 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 306 W

Measures:



- 120 mm diameter pipe
- Light Intensity: 110 lux
- Colour Temperature: 2700 K

Environment and Safety:

- Energy Efficiency Class: F*

* In accordance with the EU-Regulation No 65/2014

**Series 4, built-under cooker hood, 90
cm, Stainless steel
DHU965CGB**

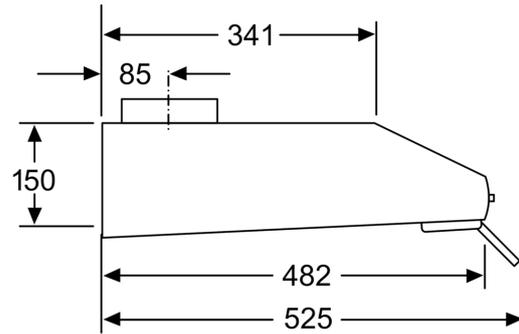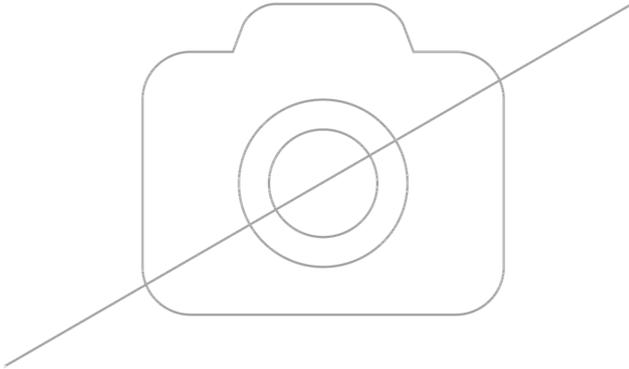

measurements in mm